

Durable Insulated Container - HR440L-LC

Confidential Technical Specifications





Features:


- Thicker, stronger, one piece seamless construction of specially formulated high impact polyethylene that meets FDA, USDA and HPB requirements for safe food handling.
- New foam adhesion technology now standard providing optimal long-term thermal performance.
- Custom formulated, foamed in place, urethane insulation that improves insulation quality, structural integrity and adhesion to poly walls.
- Caster Base including two straight and two locking swivel casters.
- One piece, seamless interior with sharp corners improves cube utilization.
- New rubber latch design that pivots out of the way preventing latch damage.
- Gas spring lid stay on a hinged lid with lid gasket standard.
- Locking provision standard.

Product Specifications:

- External dimensions - 1174w x 800d x 1075h / 46.188"w x 31.5"d x 42.313"h
- Internal dimensions - 1023w x 648d x 657h / 40.25"w x 25.5"d x 25.875"h
- Internal capacity - 440 liters / 16 cubic feet
- Tare weight - 60 kg / 131 lbs.
- Recommended Payload - 500 kg / 1100 lbs.
- Recommended stacking height - 2 high empty
- 53' Tractor Trailer Qty. - 78 units
- Ocean Container Qty. - 40' HC = 65 units, 40' = 48 units, 20' = 22 units

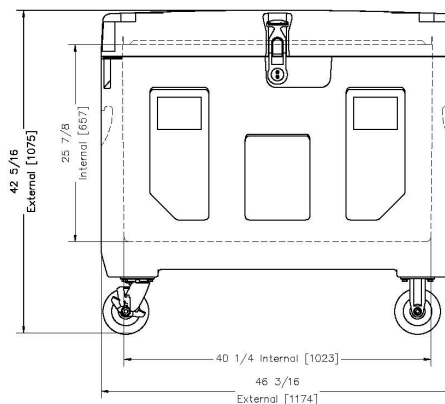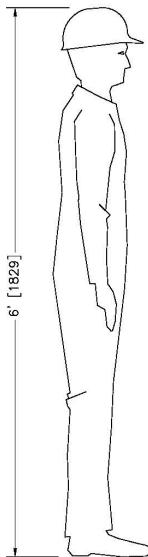

FRONT

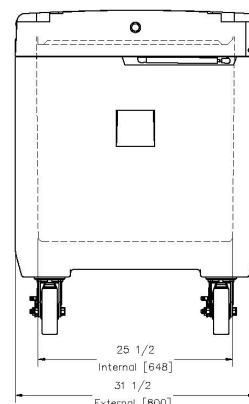

RIGHT

